


A320 *Advanced PCIe card*

Intelligent Multiport Card

Support upto **64 Ports**

Support PCIe slot

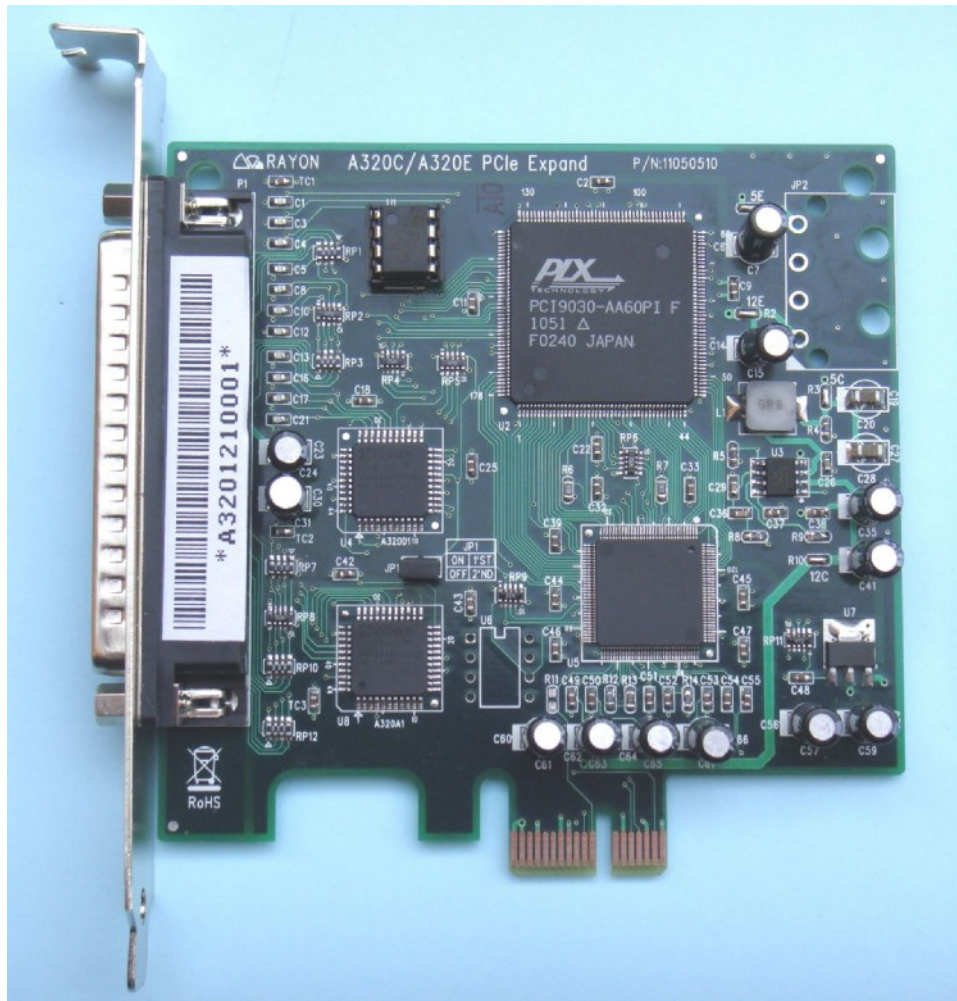

- ☆ Support upto **64 serial ports** in one PCIe slot.
- ☆ Just one **IRQ for 64 ports**.
- ☆ Support **Windows 95/98/Me** system driver.
- ☆ Support **Windows NT/2000/XP/Vista/WIN7/8/10** system driver.
- ☆ Support **Linux** and **SCO** Openserver System driver.
- ☆ **Expand from 8 serial ports to 64 serial ports only need 5 seconds.**

A320 specification:

System structure

- ▲ A320 intelligent multi-port card.
- ▲ NF641N/NF116/NF216/NF316 or IF108/IF208/IF308 multi-port connector box.

System resource and IRQ map

- ▲ Memory map model:
 - * 128Byte for PCI controller.
 - * Two 4kbyte for UART controller.
- ▲ I/O map model:
 - * 128Byte I/O for PCI controller.
 - * 256Byte I/O for UART controller.
 - * 64Byte I/O for status register
- ▲ one free IRQ assigned by PCI BIOS.

Hardware compatibility

- ▲ PCIe bus slot.

Software compatibility

- ▲ *WIN 95/98/Me.* (I/O map model only).
- ▲ *Windows NT* system.
- ▲ *Windows 2000/XP/Vista/WIN7/8/10* system.
- ▲ *SCO Openserver.*
- ▲ *Linux system.*

Port capability

- ▲ Each A320 card can use with NF641N/NF116/NF216/NF316 or IF108/IF208/IF308 box.
- ▲ each A320 card can support up to 64 serial ports in any combination.

Dimension

- ▲ card: 10.0 * 9.5 cm.

Interface:

- ▲ NF641N box: RS232C compatible.
8 ports per box.
- ▲ NF116 box: RS232C compatible.
16 ports per box.
- ▲ NF216 box: RS422/RS485 settable
16 ports per box.
- ▲ NF316 box: RS232/RS422/RS485 settable
16 ports per box.
- ▲ IF108 box: GROUND Isolated RS232C compatible.
8 ports per box.
- ▲ IF208 box: GROUND Isolated RS422/RS485
settable 8 ports per box.
- ▲ IF308 box: GROUND Isolated
RS232/RS422/RS485 settable 8 ports per box.

Baud Rate: each port can be configured to
110~115200bps.

Flow Control:

- ▲ XON/XOFF software handshake.
- ▲ RTS/CTS hardware handshake.

Connector type:

- ▲ NF116/NF216/NF316 box: **DB9** male connector.
- ▲ IF108/IF208/IF308 box: **DB9** male connector.
- ▲ NF641N box: DB25 male connector

Environment

- ▲ operating temperature: 5°C to 40°C.
- ▲ operating humidity: 10% to 90% RH.
- ▲ storage temperature: 0°C to 65°C.
- ▲ storage humidity: 5% to 90% RH.

Other relative products.

- ▲ User can use P640NU card in PCI slot and use same connector box
- ▲ P990F card: built-in 80960JF local processor.
- ▲ IOP3927F card: built-in 133MHz MIPS local processor.

☆ All names are the trademarks of their respective organizations.



RAYON TECHNOLOGY CO., LTD.

2F, No. 177, Chung Shan 2 Rd., Lu Chou, New Taipei city, Taiwan.
TEL: 886-2-82858362 FAX: 886-2-82857065
E-Mail: rayon@ms1.hinet.net or info@rayontech.com.tw
WEB: <http://www.rayontech.com.tw>