APORT040
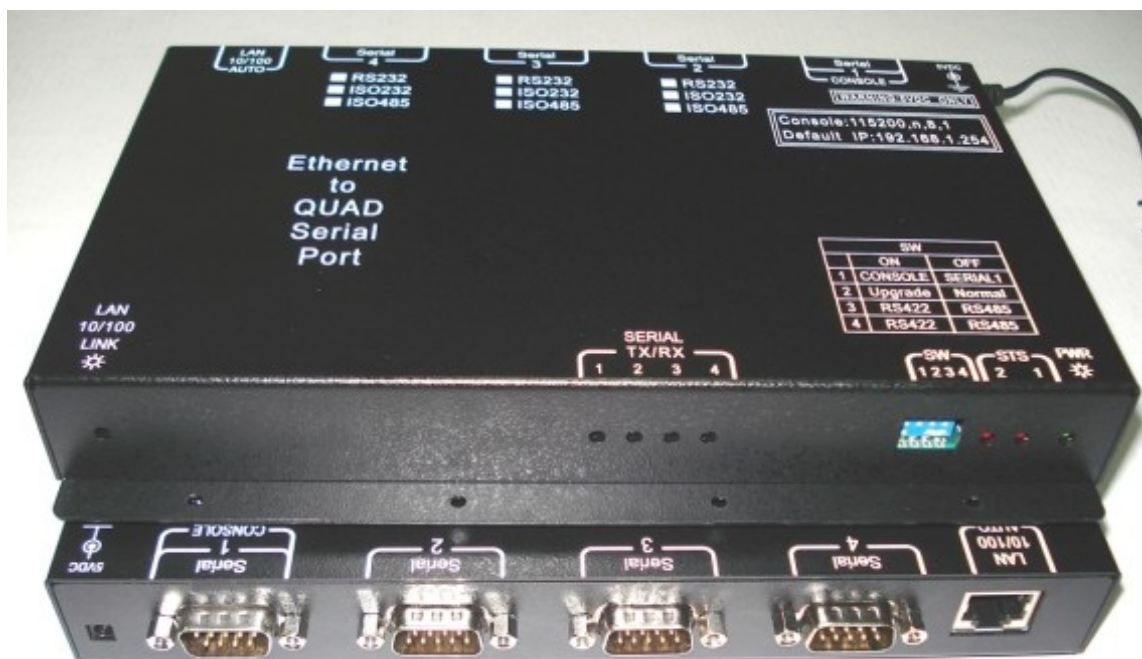
IP to Serial Port Converter

◆ 10/100Mbps LAN Connection

◆ 4 isolated RS232 Serial Port

◆ Linux based system board

★Linux based system board easy to maintain.

★Auto-detecting 10/100Mbps Ethernet interface.

★Support WIN NT/2000/XP/Vista/WIN7/8/10 virtual COM drive.

★Support UNIX & Linux real TTY driver.

★Support TCP server/Client mode.

★Support UDP send/receive mode.

★Support WEB,TELNET and terminal setup.

★Support Ground isolated RS232 interface

APORT040 IP to Serial Port Converter Specification：

Hardware Specification:

*CPU: 32bit 100MHz MIPS CPU.

*Flash ROM: 16M Byte.

*SDRAM: 16M Byte.

Serial port:

*Interface: Ground isolated RS232

*connector: DB9 male.

*Port Number: 4.

*speed: upto 230400bps.

   NOTE: console port share with serial port 1

LAN connection:

*Interface: 10/100Mbps 100BaseT

*connector: RJ45

Software Compatibility:

*TCP/IP or UDP/IP connection.

*WIN 7/8/2000/XP/10 Virtual COM driver.

*LINUX raw TTY driver.

*SCO UNIX real TTY driver.

Power Requirement:

*5VDC @ 1200mA.

Dimension:

205*135*29mm.

Environment：

*Operating temperature: 5--40 ℃.

*Operating humidity: 10--90%RH.

*Storage temperature: 0--65 ℃.

*Storage humidity: 5--90%RH.

Other relative product information:

APORT200: IP to two RS232 serial port converter.

APORT020: IP to two ground isolated RS232 serial port converter.

APORT101: IP to one RS232 and one ground isolated RS422/485 serial port converter.

APORT400: IP to four RS232 serial port converter.

APORT004: IP to four Ground isolated RS422/485 serial port converter

APORT800: IP to eight RS232 serial port converter

APORT202: IP to two RS232 and two ground isolated RS422/485 serial port converter.

APORT022: IP to two ground isolated RS232 and two ground isolated
   RS422/485 serial port converter.

   ***All names are the trademarks of their respective organization.