


IP101 IP Serial Device Server

10/100Mbps LAN Connection RS232/422/485 Serial Interface

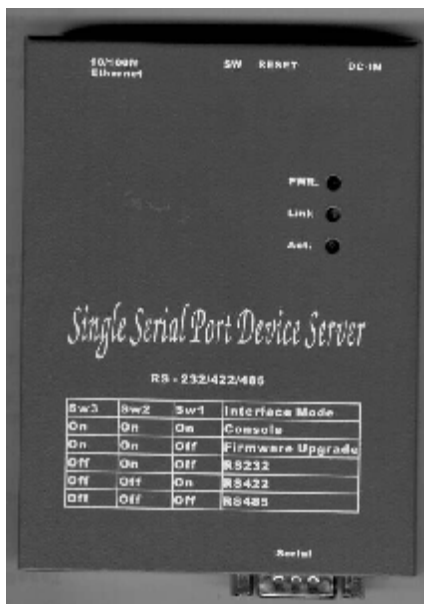

- ☆ Auto-detecting **10/100Mbps** Ethernet interface.
- ☆ **DIP switch** set serial port RS232/422/485 interface type.
- ☆ Support **WIN95/98/Me** virtual COM driver.
- ☆ Support **WIN NT/2000/XP/2003** virtual COM driver.
- ☆ Support **paired mode**.
- ☆ Support **Direct IP mode**.
- ☆ Support **Auto-Data-Direction-Control** feature in RS485 interface.

IP101 IP Serial Device Server Specification:

LAN connection:

- ▲ interface: 10/100Mbps 100BaseT
- ▲ connector: RJ45

Software Compatibility:

- ▲ TCP/IP or UDP/IP connection.
- ▲ WIN95/98/Me virtual COM driver.
- ▲ WIN NT virtual COM driver.
- ▲ WIN2000/XP/2003 virtual COM driver.

Power Requirement:

- ▲ 12VDC @ 500ma.

Environment:

- ▲ Operating temperature: 5°C~40°C.
- ▲ Operating humidity: 10%~90%RH
- ▲ Storage temperature: 0°C~65°C.
- ▲ Storage humidity: 5%~90%RH.

Other Relative Products:

- ▲ IP102 IP Serial Device Server: support 2 RS232/RS422/RS485 serial port.
- ▲ GPORT104 IP Serial Device Server: support 8 RS232 serial port.
- ▲ GPORT108 IP Serial Device Server: support 8 RS232 serial port.
- ▲ GPORT116 IP Serial Device Server: support 16 RS232 serial port.

Serial Port:

- ▲ Interface: RS232/422/485 set by DIP switch
- ▲ connector: DB9 male

Indicator capability:

- ▲ PWR LED: power on indicator.
- ▲ Link LED: LAN connection indicator.
- ▲ Act LED: server active indicator.

Dimension:

- ▲ 1138 * 85 * 23 mm.



RAYON TECHNOLOGY CO., LTD.

2F, No. 177, Chung Shan 2 Rd., Lu Chou city, Taipei Hsien, Taiwan.

TEL: 886-2-82858362 FAX: 886-2-82857065

E-Mail: rayon@ms1.hinet.net

WEB: <http://www.computex.com.tw/rayon>

WEB: <http://www.rayontech.com>