


P4232U Universal PCI/PORT Card

Flexible ----- 3.3V & 5V PCI

Powerful ----- RS232, RS422, RS485

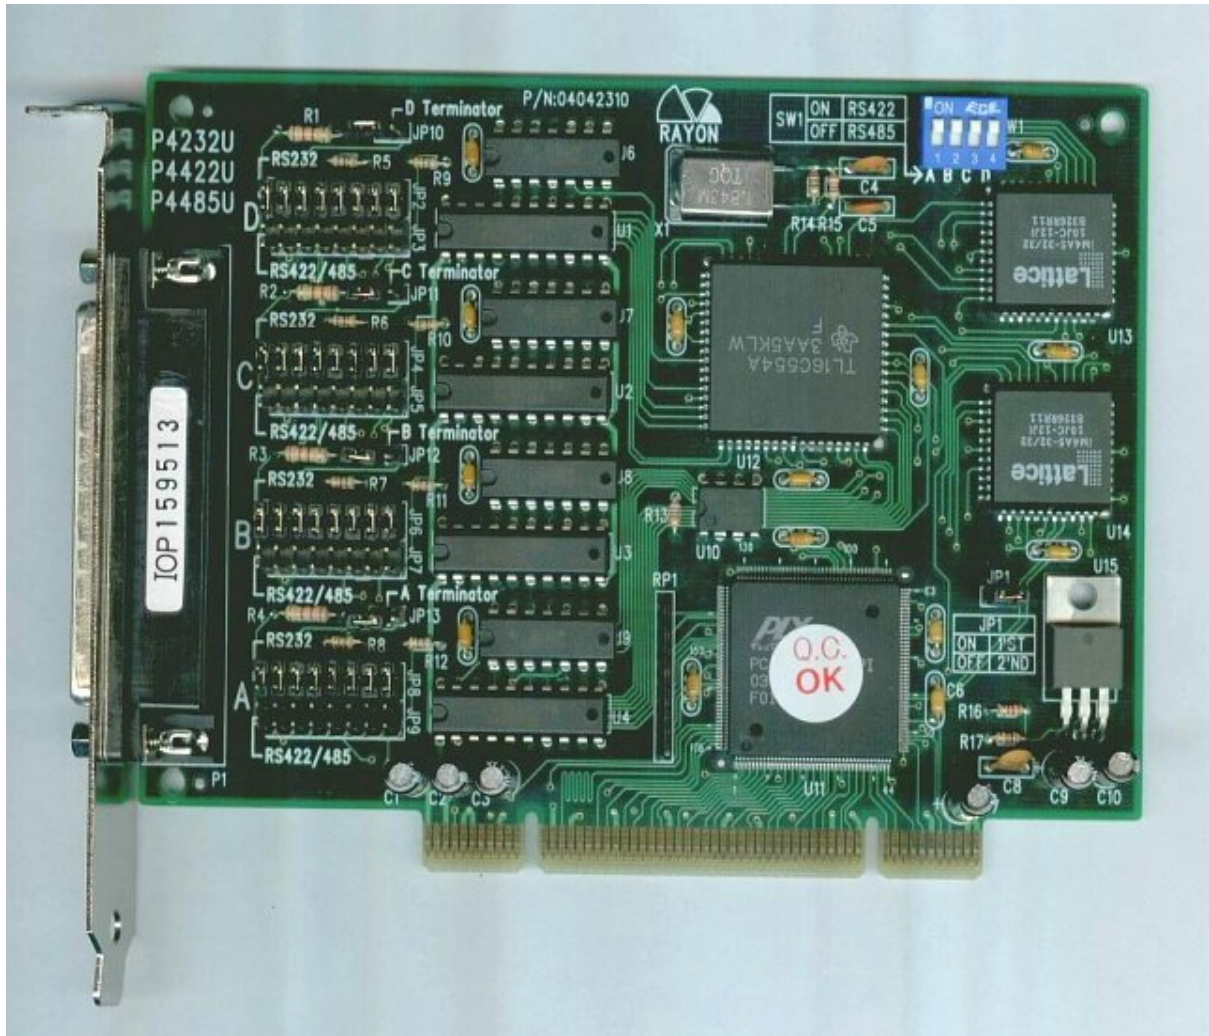

- ☆ Support **four RS232/RS422/485** ports in one card.
- ☆ Support **any RS232, RS422, RS485** port combination in one card.
- ☆ Support **UNIX & LINUX** system driver.
- ☆ Support **Windows 95/98/Me/NT/2000/XP/2003** system driver.
- ☆ Support **DOS** driver.
- ☆ Support Auto-Data-Direction-Control(**ADDC**) feature in RS485 port.
- ☆ Support jumper setting for terminator resistor insert or not.

P4232U Specification :	
<u>System Structure :</u> *Intelligent PCIPORT card. *External cable with four standard DB25/DB9 connector.	<u>Serial Communication Controller :</u> *Type: 16550A compatible with PGA support. *Speed: 1.8432MHz. (can be used upto 7.3728MHz)
<u>Hardware compatibility :</u> *3.3V & 5V PCI bus slot.	<u>Port capability :</u> *Number of port: 4 ports per card. *Interface: RS232C, RS422, RS485 jumper selectable.
<u>Software compatibility :</u> *DOS Library *WIN2000/XP/2003 *WIN95/98/Me *Windows NT *Linux *SCO OpenServer	<u>Port capability :</u> *Baud Rate: each port can be configured to 50--115200bps. *Connector type: DB25 male connector. (with A400 cable) DB9 male connector. (with P485 cable)
<u>System I/O & IRQ mapping :</u> *one 32byte and one 8byte I/O mapping assigned by PCI BIOS. *one IRQ mapping assigned by PCI BIOS.	<u>Environment :</u> *operating temperature: 0°C to 55°C. *operating humidity: 10% to 95% RH. *storage temperature: 0°C to 65°C. *storage humidity: 5% to 95% RH.
<u>Dimension :</u> *card: 5.6 * 4.2 inch.	

- *IOP3927 X-PORT card : support upto 64 ports per card.
- *P232 PCIPORT card : two RS232 port card.
- *P422N PCIPORT card : two RS422/485 port card.
- *P422I PCIPORT card : two ground isolated RS422/485 port card.
- *P584U PCIPORT card : universal four RS232 port card.
- *P485 PCIPORT card : four ground isolated RS422/485 port card.
- *P485U PCIPORT card : universal four RS422/485 port card.
- *P588U PCIPORT card : universal eight RS232 port card.
- *P8485U PCIPORT card : universal eight RS422/485 port card.

***All names are the trademarks of their respective organization.



2F, No. 177, Chung Shan 2 Rd., Lu Chou city, Taipei Hsien, Taiwan.
TEL: 886-2-82858362 FAX: 886-2-82857065
E-Mail: rayon@ms1.hinet.net
WEB: <http://www.computex.com.tw/rayon>
WEB: <http://www.ravontech.com>