P5584U
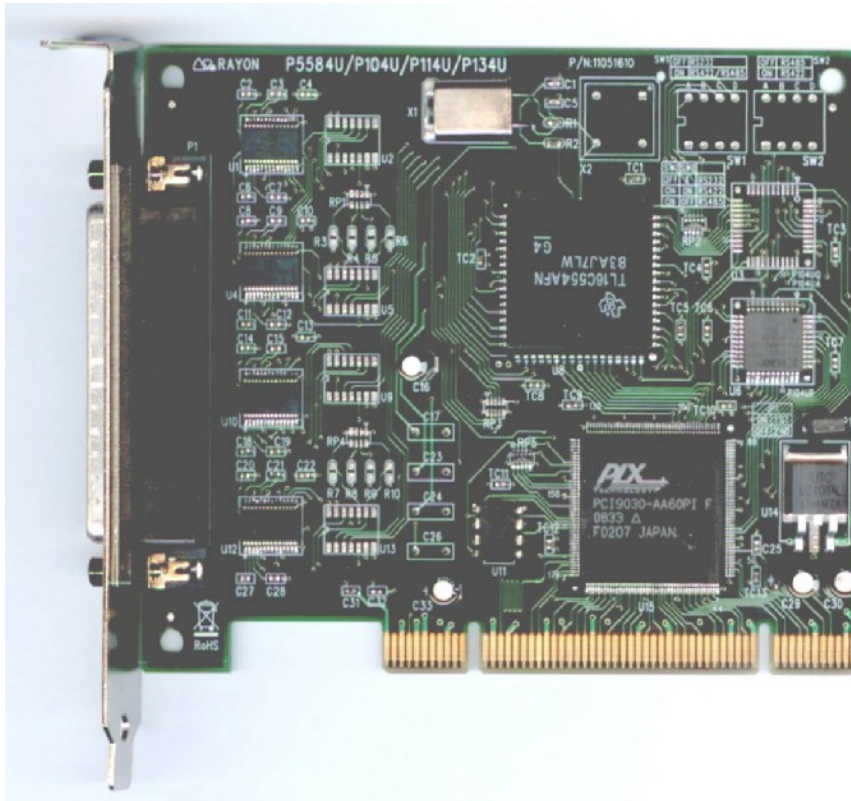
Universal PCI Four Port Card

Flexible 5V power supply only PCI card

- ■ Suitable for **Windows NT**
- ■ Suitable for **WIN95/98/Me**
- ■ Suitable for **WIN2000/XP**
- ■ Suitable for **WIN7/8/10**

- ■ Suitable for **DOS** Power User
- ■ Suitable for **Linux** System
- ■ Suitable for **UNIX** Workgroup

◆ Support 5V & 3.3V PCI slot.

◆ IRQ & I/O mapping automatically assigned by PCI plug & play function.

◆ Just use 5V power supply for RS232 serial port.

◆ Support surge protector in TXD/RXD signal line.

P5584U Specification

System Structure:
▲intelligent PCIPORT Card.
▲external cable with four standard DB25/DB9 connector.

Serial Communication Controller:
▲type：16550A compatible with PGA support.
▲speed：1.8432MHz.

Hardware Compatibility:
▲5V & 3.3V PCI bus slot.

Software Compatibility:
▲DOS Library
▲WIN7/8/10
▲WIN2000/XP
▲WIN95/98/Me
▲Windows NT
▲Linux
▲SCO OpenServer

System I/O & IRQ mapping:
▲one 32byte and one 8byte I/O mapping assigned by PCI BIOS.
▲one IRQ mapping assigned by PCI BIOS.

Port capability:
▲Number of port：4 ports per card.
▲Interface：RS232C (with standard DB37 to four DB25/DB9 connector cable)
▲Signal:
   TXD,RXD,RTS,CTS,DTR,DSR,DCD,GND.
   NOTE: Just use 5V power supply from PCI slot.
▲Baud Rate：
   each port can be configured to
   50~115200bps.
▲Connector type：
   DB25 male connector. (with A400 cable)
   DB9 male connector. (with P485 cable)

Dimension:
▲P5584U card: 12.0 * 10.0 cm.

Environment:
▲operating temperature：0℃ to 55℃ .
▲operating humidity：10％ to 95％ RH.
▲storage temperature：0℃ to 65℃.
▲storage humidity：5％ to 95％ RH.

☆Other relative 5V power supply only four port card product line:

Model	RS232	RS422	RS485
P5984	4	0	0
P104UP	4	0	4
P5985	0	4	4
P5914	4	4	4
P114U	4	4	4