


PCI4S

asix_PCI Card

PCI Four Port Card

Flexible 5V power supply only PCI card

Support 4 RS232 serial port

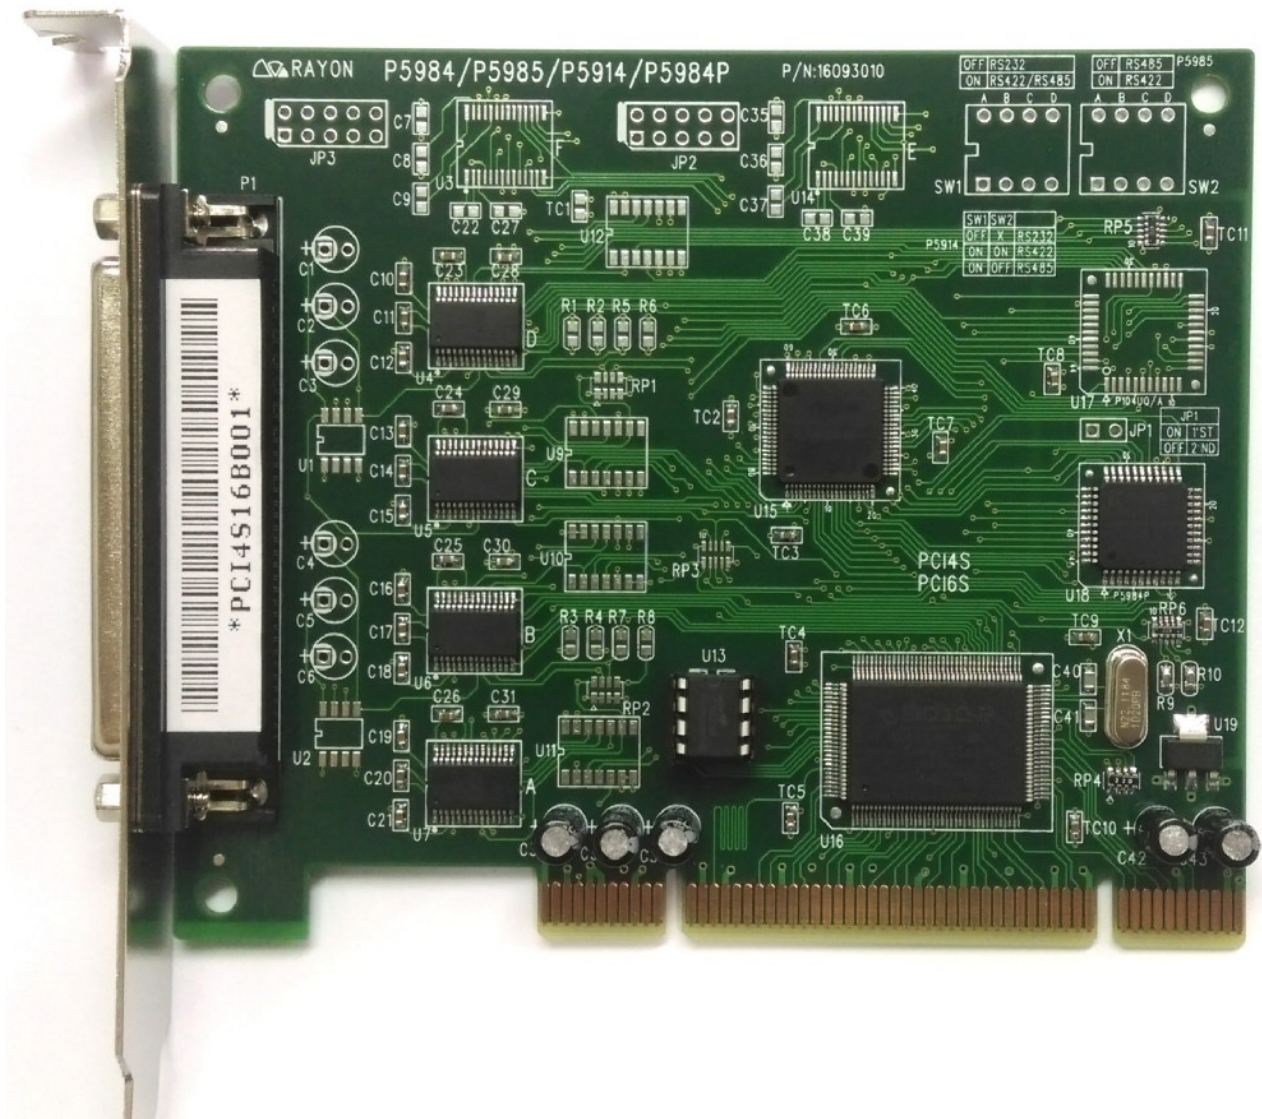

- ◆ Use ASIX MCS9845 controller.
- ◆ IRQ & I/O mapping automatically assigned by PCI plug & play function.
- ◆ Just use 5V power supply for RS232 serial port.
- ◆ Support surge protector in TXD/RXD signal line.

PCI4S Specification

System Structure:

- ▲intelligent Asix_PCI Card.
- ▲external cable with four standard DB25/DB9 connector.

Serial Communication Controller:

- ▲type : 16550A compatible with PGA support.
- ▲speed : 1.8432MHz.

Hardware Compatibility:

- ▲5V PCI bus slot.

Software Compatibility:

- ▲DOS Library
- ▲WIN7/8/10
- ▲WIN XP
- ▲Linux

System I/O & IRQ mapping:

- ▲six 8byte I/O mapping assigned by PCI BIOS.
- ▲one IRQ mapping assigned by PCI BIOS.

Port capability:

- ▲Number of port : 4 ports per card.
- ▲Interface : RS232C (with standard DB37 to four DB25/DB9 connector cable)
- ▲Signal:
TXD,RXD,RTS,CTS,DTR,DSR,DCD,GND.
**NOTE: Just use 5V power supply from PCI slot.*
- ▲Baud Rate :
each port can be configured to
50~115200bps.
- ▲Connector type :
DB25 male connector. (with A400 cable)
DB9 male connector. (with P485 cable)

Dimension:

- ▲PCI4S card: 12.0 * 10.0 cm.

Environment:

- ▲operating temperature : 0°C to 55°C .
- ▲operating humidity : 10% to 95% RH.
- ▲storage temperature : 0°C to 65°C .
- ▲storage humidity : 5% to 95% RH.

☆Other relative 5V power supply only four port card product line:

Model	RS232	RS422	RS485
P5984	4	0	0
P5984P	4	0	0
P5985	0	4	4
P5914	4	4	4



RAYON TECHNOLOGY CO., LTD.

2F, No. 177, Chung_Shan 2 Rd., Lu_Chou city, Taipei Hsien, Taiwan.

TEL: 886-2-82858362 FAX: 886-2-82857065

E-Mail: rayon@ms1.hinet.net ; info@rayontech.com.tw

WEB: <http://www.computex.com.tw/rayon>

WEB: <http://www.rayontech.com.tw>