


Pe232 PCI Express Card

PCIe Bus Two Port Card

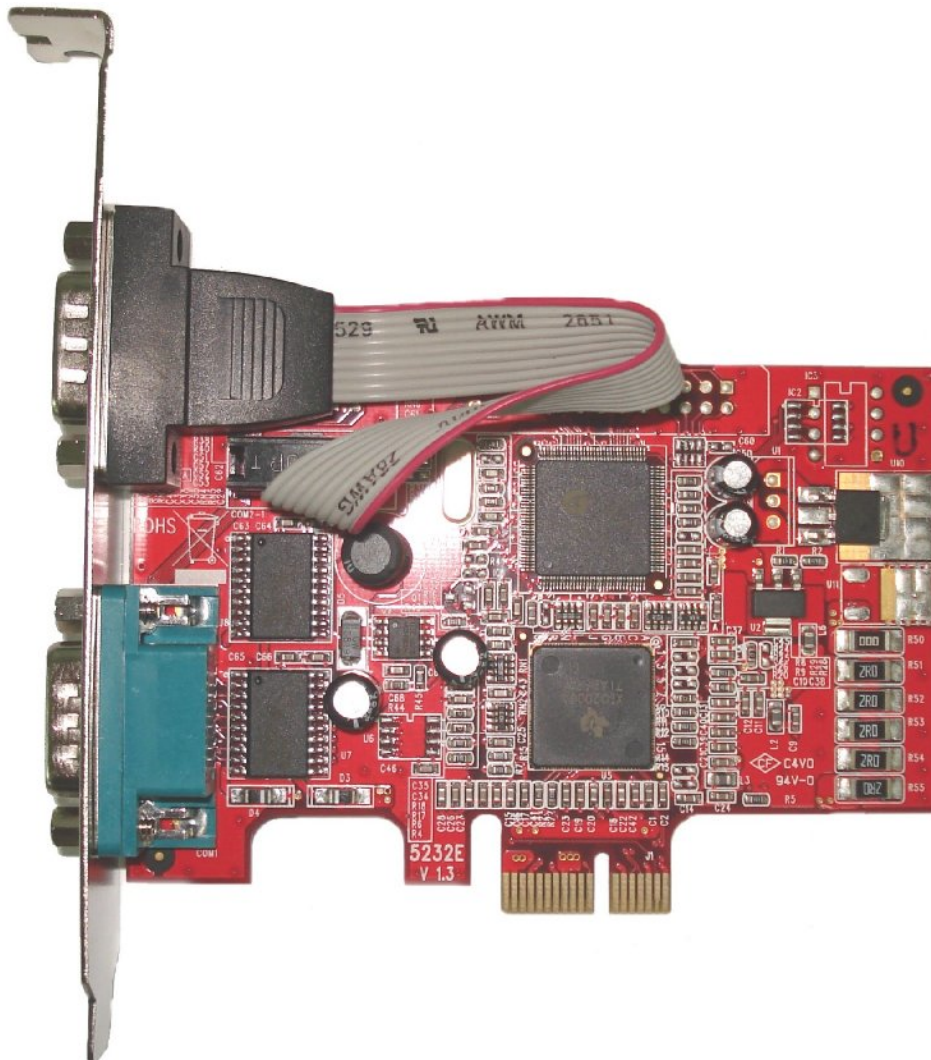

- ★Suitable for **industrial control**
- ★Suitable for **DOS**
- ★Suitable for **Windows NT**
- ★Suitable for **Windows 95/98/Me**
- ★Suitable for **Windows 2000/XP**
- ★Suitable for **Windows Vista**
- ★Suitable for **Linux**

Pe232 Specification :	
<u>Serial Communication Controller :</u>	
*type : Oxford 16950 compatible.	
*speed : 14.7456MHz.	
<u>Hardware compatibility :</u>	<u>System I/O & IRQ mapping :</u>
*PCIe bus slot.	*I/O mapping assigned by PCI BIOS.
	*Memory mapping assigned by PCI BIOS.
	*one IRQ mapping assigned by PCI BIOS.
<u>Software compatibility :</u>	
*DOS.	*Windows Vista.
*Windows 95/98/Me.	*Linux.
*Windows NT.	*Other operation system.
*Windows 2000/XP.	
<u>Port capability :</u>	
*number of port : 2 ports per card.	*Baud Rate: each port can be configured to
*Interface : RS232.	50--115200bps.
	*Connector type: DB9 male connector.
<u>Dimension :</u>	
*Pe232 card : 101 * 65 mm	
<u>Environment :</u>	
*operating temperature : 0℃ to 55℃	*storage temperature : 0℃ to 65℃
*operating humidity : 10% to 95% RH	*storage humidity : 5% to 95% RH

Performance upgrade capability and relative products :
*P232 : PCI card support two RS232 ports.
*P422I card: PCI card support two isolated RS422/485 ports.
*P485 card: PCI card support four isolated RS422/485 ports.
*UTS485 box: USB to two RS232 and two ground isolated RS422/485 ports.
***All names are the trademarks of their respective organization.

	RAYON TECHNOLOGY CO., LTD. 2F, No. 177, Chung Shan 2 Rd., Lu Chou city, Taipei Hsien, Taiwan. TEL: 886-2-82858362 FAX: 886-2-82857065 E-Mail: rayon@ms1.hinet.net WEB: http://www.computex.com.tw/rayon WEB: http://www.rayontech.com
---	---