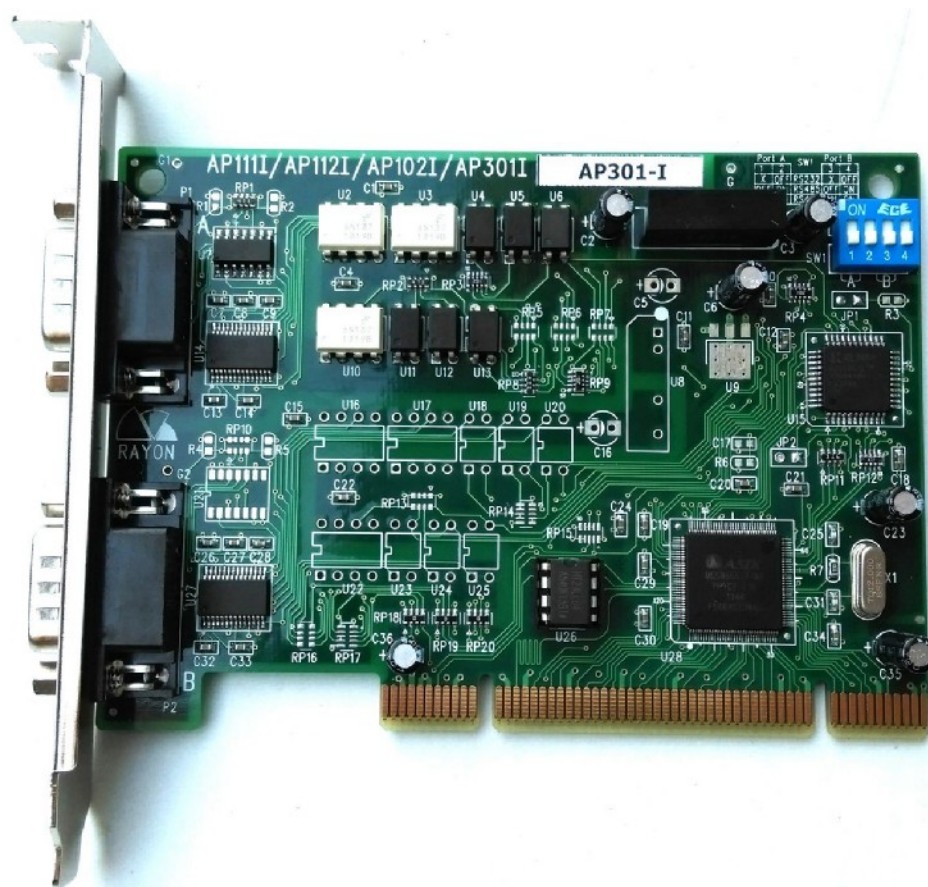# AP301-I Advanced PCI Card

PCI Bus Two Port Card

Support one RS232 and one Ground Isolated RS232/RS422/RS485 interface

★Port 1 can set to target RS232/RS422/RS485

★Support ADDC feature in RS485

★Suitable for industrial control

★Suitable for DOS system.

★Suitable for Windows 2000/XP

★Suitable for Vista & WIN7/8/10

★Suitable for Linux

AP301-I Specification：

Serial Communication Controller：
 *type：ASIX chip MCS9865.

Hardware compatibility：
 *5V or 3.3V PCI bus slot.

Software compatibility：
 * DOS system.
* Windows 2000/XP.
 * Windows Vista.
 * WIN7/8/10.
 * Linux.
 * Other operating system

Dimension：
 * AP301-I card: 100 * 97 mm.
 * AP301-I model with standard PCI
   bracket.

System I/O & IRQ mapping：
 *I/O mapping assigned by PCI BIOS.
 *Memory mapping assigned by PCI BIOS.
 *IRQ mapping assigned by PCI BIOS.

Port capability：
 *number of port：2 ports per card.
 *Interface：Port 2 is RS232 and port 1 is
Ground Isolated RS232/RS422/RS485
     Note: port 1 can set to RS232/RS422/RS485 by
            DIP switch.
 *Baud Rate：each port can be configured to
   50--115200bps.
 *Connector type: DB9 male connector.

Environment：
 *operating temperature：0℃ to 55℃
 *operating humidity：10% to 95% RH
 *storage temperature：0℃ to 65℃
 *storage humidity：5% to 95% RH

Performance upgrade capability and relative products：
   *AP102-I：PCI card support two Ground Isolated RS232 ports.
   *AP132-I：PCI card support two Ground Isolated RS422/RS485 ports.
   *AP112-I：PCI card support two Ground Isolated RS232/422/485 port.
   *APLOG301-I ： PCI card support monitored RS232 to Ground Isolated
RS232/422/485 Converter via two serial ports.
   *AP112：PCI card support two RS232/RS422/RS485 ports.
   *AP132：PCI card support two RS422/RS485 ports.
   *AP102：PCI card support two RS232 ports.

      ***All names are the trademarks of their respective organization.