


# **S232** *Serial Port Sharer*

- ◆ **One Master to Three Slave port**
- ◆ **Support 4 RS232 port**
- ◆ **Powerful and Flexible**

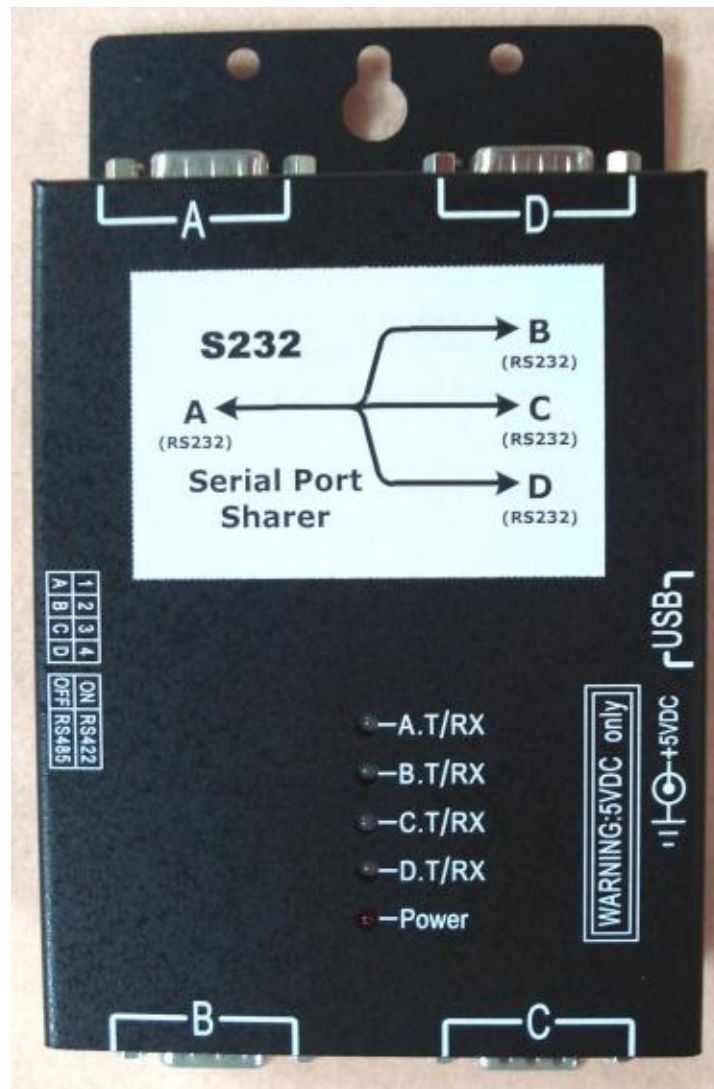

- ★ Any data from port A will be sent to port B,C,D simultaneously.
- ★ Any data from port B,C,D will be sent to port A only.

## **S232 Specification :**

### **Serial Port interface:**

- \*Connector type: DB9 male connector.
- \*interface type: RS232.
- \*Number of ports: 4 (port A,B,C,D)

### **Power input:**

- \*UP110/UP220 US/EU type power adaptor
- \*100--240 VAC input.
- \*5VDC 1000mA output.
- \*Current consumption: 400mA @ 5VDC.

### **LED indicator:**

- \*PWR: DC power input ON indicator.
- \*ATRX: serial port A TXD/RXD signal activity.
- \*BTRX: serial port B TXD/RXD signal activity.
- \*CTRX: serial port C TXD/RXD signal activity.
- \*DTRX: serial port D TXD/RXD signal activity.

### **Dimension :**

- \*S232 box: 90mm (W) \* 150mm (L) \* 27mm(H)

### **Environment :**

- \*operating temperature: 0°C to 55°C.
- \*operating humidity: 10% to 95% RH.
- \*storage temperature: 0°C to 65°C.
- \*storage humidity: 5% to 95% RH.

## **Other series product:**

- S232io box is ISO RS232 master port and 3 ISO RS232 slave ports.
- S432io box is ISO RS422/485 master port and 3 ISO RS232 slave ports.
- S434io box is ISO RS422/485 master port and 3 ISO RS422/485 slave ports.
- S234io box is ISO RS232 master port and 3 ISO RS422/485 slave ports.

\*\*\*All names are the trademarks of their respective organization.



### **RAYON TECHNOLOGY CO., LTD.**

2F, No. 177, Chung Shan 2 Rd., Lu Chou city, Taipei Hsien, Taiwan.

TEL: 886-2-82858362 FAX: 886-2-82857065

E-Mail: [rayon@ms1.hinet.net](mailto:rayon@ms1.hinet.net)

WEB: <http://www.computex.com.tw/rayon>

WEB: <http://www.rayontech.com>