


S272 Serial Port Sharer

◆ **One Master to Seven Slave port**

◆ **Powerful and Flexible**

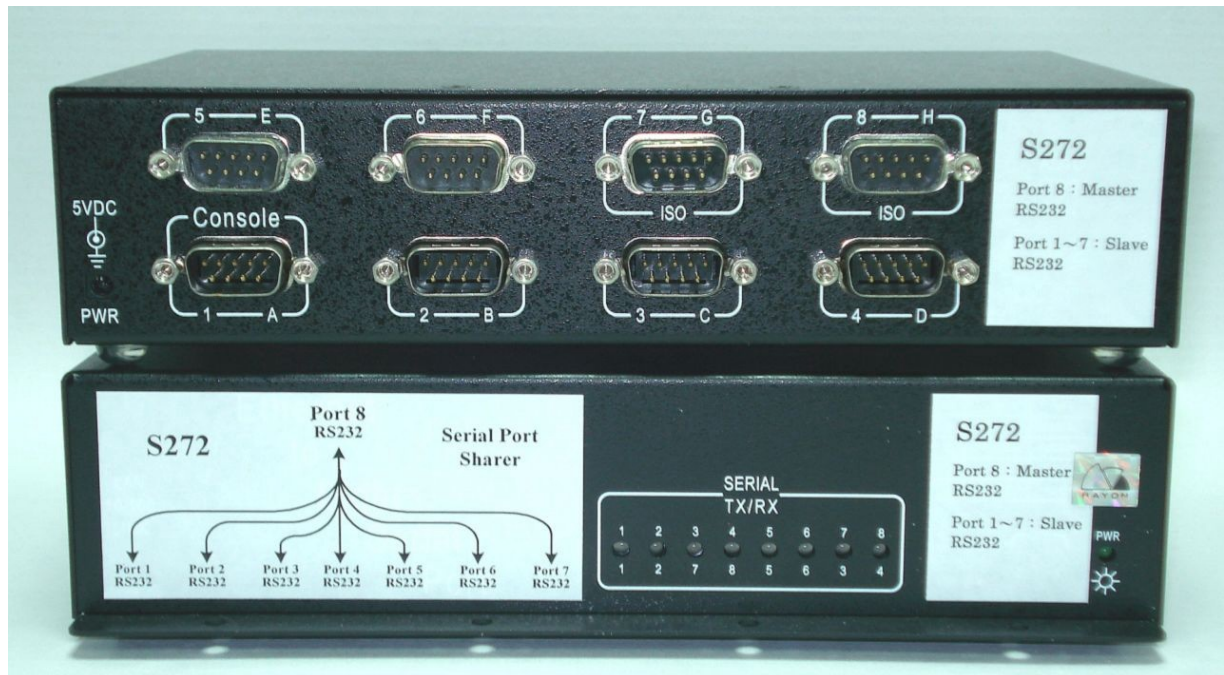

- ★ Any data from master port 8 will be sent to port 1--7 simultaneously.
- ★ Any data from slave port 1--7 will be sent to port 8 only.
- ★ LED in front panel can monitor data transmission activity.

S272 Specification :

Serial Port interface:

- *Connector type: DB9 male connector.
- *interface type: RS232.
- *Number of ports: 8 (port 1--8)

Power input:

- *UP110/UP220 US/EU type power adaptor
- *100--240 VAC input.
- *5VDC 1000mA output.
- *Current consumption: 400mA @ 5VDC.

LED indicator:

- *PWR: DC power input ON indicator.
- *1TX/RX: serial port 1 TXD/RXD signal activity.
- *2TX/RX: serial port 2 TXD/RXD signal activity.
- *3TX/RX: serial port 3 TXD/RXD signal activity.
- *4TX/RX: serial port 4 TXD/RXD signal activity.
- *5TX/RX: serial port 5 TXD/RXD signal activity.
- *6TX/RX: serial port 6 TXD/RXD signal activity.
- *7TX/RX: serial port 7 TXD/RXD signal activity.
- *8TX/RX: serial port 8 TXD/RXD signal activity.

Dimension :

- *S272 box: 205mm (W) * 135mm (L) * 48mm(H)

Environment :

- *operating temperature: 0°C to 55°C.
- *operating humidity: 10% to 95% RH.
- *storage temperature: 0°C to 65°C.
- *storage humidity: 5% to 95% RH.

Other series product:

S472i box is ISO RS485 master port and 7 RS232 slave ports.

S232 box is RS232 master port and 3 RS232 slave ports.

S432io box is ISO RS422/485 master port and 3 ISO RS232 slave ports.

***All names are the trademarks of their respective organization.



RAYON TECHNOLOGY CO., LTD.

2F, No. 177, Chung Shan 2 Rd., Lu Chou, New Taipei city, Taiwan, R.O.C.

TEL: 886-2-82858362 FAX: 886-2-82857065

E-Mail: rayon@ms1.hinet.net or info@rayontech.com.tw

WEB: <http://www.rayontech.com.tw>