


PCIe Bus Four Port Card RS422 / RS485 selectable

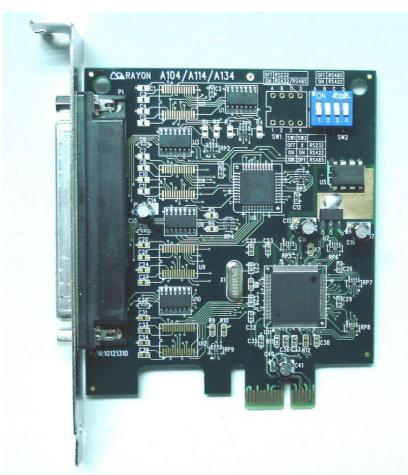

★Each port can set to RS422/RS485
★Easy to set by DIP switch
★Support ADDC feature in RS485.
★Suitable for industrial control
★Suitable for Windows 2000/XP
★Suitable for Vista & WIN7/8/10
★Suitable for Linux

A134 Specification :	
Serial Communication Controller :	Port capability :
*type : ASIX MCS9904	*number of port : 4 ports per card.
	*Interface : RS422/RS485.
Hardware compatibility :	Note: Each port can set to RS422/RS485 by DIP
*PCIe bus slot.	switch.
	*Baud Rate: each port can be configured
<u>Software compatibility :</u>	to 50921600bps.
* Windows 2000/XP.	*Connector type: DB37 female connector.
* Windows Vista.	*P485 cable support DB37 male to four
* WIN7/8/10.	DB9 male connector.
* Linux.	*A400 cable support DB37 male to four
* Other operation system.	DB25 male connector.
<u>Dimension :</u>	<u>Environment :</u>
*A134 card: 82 * 97 mm.	*operating temperature $:0^\circ\!\mathbb{C}$ to $55^\circ\!\mathbb{C}$
*A134 model with standard PCIe bracket.	*operating humidity : 10% to 95% RH
	*storage temperature : 0 $^\circ \! \mathbb{C}$ to $65 ^\circ \! \mathbb{C}$
System I/O & IRQ mapping :	*storage humidity : 5% to 95% RH

*four IRQ mapping assigned by PCI BIOS.

*I/O mapping assigned by PCI BIOS.

*Memory mapping assigned by PCI BIOS.

Performance upgrade capability and relative products :

*A102 : PCIe card support two RS232 ports.

*A132 : PCIe card support two RS422/RS485 ports.

*A112 : PCIe card support two RS232/RS422/RS485 ports.

*A104 : PCIe card support four RS232 ports.

*A114 : PCIe card support four RS232/RS422/RS485 ports.

*A168 : PCIe card support eight RS232 ports.

*A134I: PCIe card support four Ground isolated RS422/RS485 ports.

*A124I: PCIe card support two RS232 and two Ground isolated RS422/RS485 ports.

***All names are the trademarks of their respective organization.



RAYON TECHNOLOGY CO., LTD.

2F, No. 177, Chung_Shan 2 Rd., Lu_Chou, New Taipei city, Taiwan,R.O.C. TEL: 886-2-82858362 FAX: 886-2-82857065 E-Mail: <u>rayon@ms1.hinet.net</u> or <u>info@rayontech.com.tw</u> WEB: <u>http://www.rayontech.com.tw</u>